


XRD 1640 AN CS

Digital X-Ray Detector

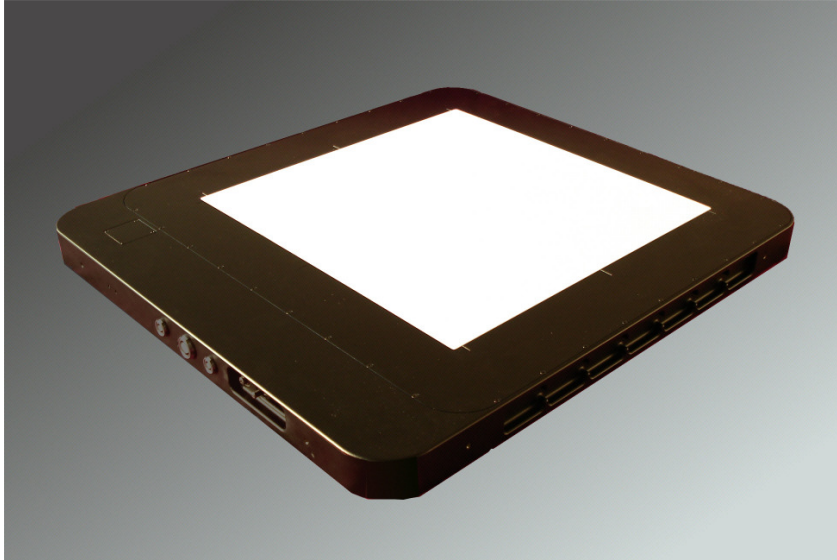

Overview

The XRD 1640 AN CS is a digital X-Ray detector based on a 16" amorphous silicon sensor operating as a two-dimensional photodiode array. X-Rays are converted into light using a Kodak LanexTMFast, LanexTMFine, Kasei DRZ High, DRZ Plus or a CsI scintillator. The information is digitized in 16 bits to achieve highest dynamic range and contrast. With a pixel size of 400 μm , an image size of 1024 x 1024 pixels, and a frame rate of 7.5 Hz, the detector is designed to fulfil the requirements of a variety of Industrial and Medical Applications.

The XRD 1640 AN CS series provides the advantage of synchronization between the detector and X-Ray source or manipulator by using an external trigger signal.

The XRD 1640 AN CS series detectors are connected to a PCI computer, with the data transferred via a customized parallel interface.

The XRD 1640 AN CS, the XRD-EP Power Supply Unit and the PCI frame grabber board are optimized for the highest performance. The image integration time is variable between 134 ms and 5 sec in steps of 1 ms (internal timer) or can be set between 133.2 ms and 1 sec in eight fixed steps (free running).

Features and Benefits

- Complete digital X-Ray detector
- Monolithic flat panel
- > 1 million pixels
- 400 μm pixel pitch
- 65.536 grey levels
- High sensitivity
- Live images @ 7.5 fps
- Suitable for a wide range of X-Ray energies
- Selectable gain setting

Applications

- Radiotherapy simulation and portal imaging
- Non-destructive testing
- 3D CT reconstruction
- Scientific & medical applications

The XRD image acquisition and demonstration software and the XRD image acquisition software library are included. The software library can be used to integrate the specific detector functions into various types of image processing software. The library supports functions for

- acquisition of a single frame or a sequence
- selection of integration times
- selection of gain setting
- selection of trigger modes
 - Free running;
 - External trigger source
 - Internal timer
 - Software trigger
- calibration procedures to acquire offset and gain correction files
- perform corrections for
 - Offset correction
 - Multiple gain correction
 - Pixel correction

Panel Specification	
Scintillator screen* (standard)	Lanex™Fine*/ Lanex™Fast*/ DRZ High / DRZ Plus
(optional)	CsI
Pixel number	1024 x 1024
Active pixel number	1000 x 1000
Pitch	400 µm
Total area	409.6 x 409.6 mm ²

Electronics Specification	
Charge amplifier	16 x 64 channel ASIC
Feedback capacitance (gain)	0.5 pF, 1 pF, 2 pF, 4 pF, 8 pF
ADC	16 x 16bit A/D @ 1MSps
Integration time (minimum)	133.2 ms
Non-Linearity ¹	< 1 % (10 % to 90 % FSR)

Detector Specification	
Dynamic range ¹	> 75 dB
Response non uniformity ¹	±2 % (10 % to 90 % FSR)
Image lag (standard)	< 8 % (1 st frame)
(CsI-option)	< 10 % (1 st frame)
Frame rate (max)	7.5 Hz
Radiation energy	40 keV – 15 MeV
Detector housing	672 x 599 x 44 mm ³

For CsI option (75 kVp, 20 mm Al filtration, 7 mm Al HVL):

MTF (0.25 lp/mm)	80% (typical 86%)
MTF (1.0 lp/mm)	30% (typical 45%)
DQE (0.25 lp/mm)	56% (typical 65%)
DQE (1.0 lp/mm)	28% (typical 37%)

Requirements	
Power supply	XRD-EP (95510254H)
Frame grabber	XRD-FG (95510214H)
PC-requirements**	CPU > 3 GHz
	RAM > 1 GB
	PCI Bus
	Windows™2000, XP

¹At 1pF Gain and 7.5 frames per second
 *Lanex™ is a registered trademark of Eastman Kodak Company
 **Windows™2000 and Windows™ XP are registered trademarks of Microsoft Cooperation
 ***DRZ is a trademark of Kaset Optonix

Worldwide Headquarters
PerkinElmer Optoelectronics
 44370 Christy Street
 Fremont, CA 94538-3180
 Telephone: +1 510-979-6500
 Toll free: (North America) +1 800-775-OPTO (6786)
 Fax: +1 510-687-1140
 Email: opto@perkinelmer.com
www.optoelectronics.perkinelmer.com

European Headquarters
PerkinElmer Optoelectronics
 Wenzel-Jaksch-Str. 31
 65199 Wiesbaden, Germany
 Telephone: (+49) 611-492-470
 Fax: (+49) 611-492-170
 Email: opto.Europe@perkinelmer.com

Asia Headquarters
PerkinElmer Optoelectronics
 47 Ayer Rajah Crescent #06-12
 Singapore 139947
 Telephone: (+65) 6775-2022
 Fax: (+65) 6775-1008
 Email: opto.Asia@perkinelmer.com



For a complete listing of our global offices, visit www.optoelectronics.perkinelmer.com

©2008 PerkinElmer, Inc. All rights reserved. The PerkinElmer logo and design are registered trademarks of PerkinElmer, Inc. All other trademarks not owned by PerkinElmer, Inc. or its subsidiaries that are depicted herein are the property of their respective owners. PerkinElmer reserves the right to change this document at any time without notice and disclaims liability for editorial, pictorial or typographical errors. 600246_01 DTS0208